


# OIL HOSE REEL

### **FEATURES**

- HEAVY DUTY SPRING
- HAND PROTECTION (ON REQ.)
- LONG LASTING
- STEEL HUB

The PIUSI OIL HOSE REEL is an automatic open hose reel for oil, entirely Made in Italy, which includes a built-in heavy duty spring. It can be installed on a wall or inside a closed cabinet and it is suitable for any kind of oil.

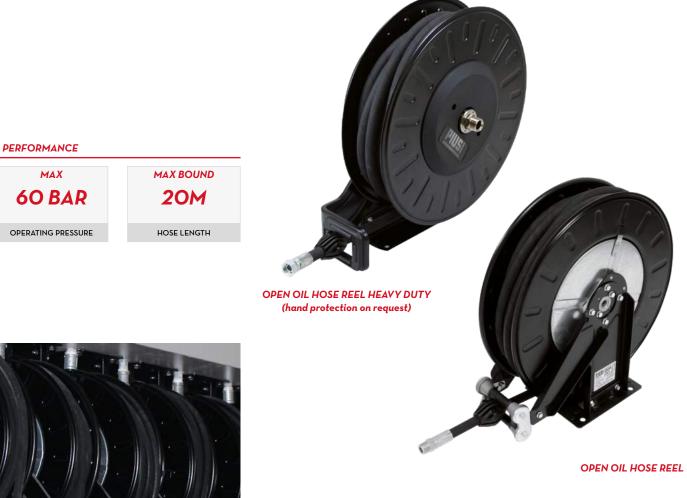

CODE	WEIGHT			N. BOXES/ EUROPALLET				
	KG	LBS	ММ	PCS/PALLET	PCS/BOX	X	-	
WITHOUT HOSE								
HN60151200A	14	30,8	550X200X540		1	12	20	
HN60153800A	14	30,8	550X200X540		1	12	20	
HN60201200A	14	30,8	550X260X540		1	12	20	
WITH HOSE								
HA6010120B	16	35,2	550X200X540		1	12	20	
HA6015120B	19	41,9	550X200X540		1	12	20	
HA6020120B	25	55	550X260X540		1	12	20	
HA60153400A	27	60	550X260X540		1	12	20	
HA60101000A	25	55	550X260X540		1	12	20	
HA60203400A	45	99	640X250X640		1	12	20	





FOOD

GASOLINE

DIESEL

#### INSTALLATION


AIR

ANTIFREEZE

Different ways to install PIUSI's hose reels: they can be easily placed wherever you need them without any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any condition.

AdBlue®

BIODIESEL

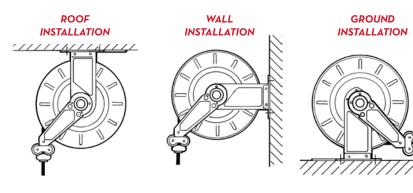

#### IN THE BOX

GREASE


- OIL HOSE REEL
- WALL MOUNT BRACKET


KEROSENE

INSTRUCTION MANUAL

DIMENSIONS

MODEL	OPEN HOSE REEL BIG	OPEN HOSE REEL SMALL			
А	495	475			
В	460	460			
с	152	102			
D	200	150			
E	246	196			
F	150	150			
G	200	150			
н	12	12			





**OPEN OIL HOSE REEL HEAVY DUTY** 

#### DETAILS





WATER

WINDSCREEN




PROTECTION ON REQUEST

#### MATERIALS

- BODY: CAST IRON
- HUB: SYNTHERED STEEL
- TUBE: RUBBER

DIFFERENT INSTALLATIONS

 $\triangleleft$ В



#### Measures expressed in millimeters

TECHNICAL DATA									
CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX WORKING PRESSURE	PRESSURE DROP	INLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	м	м
WITHOUT HOSE									
HN60151200A	REEL OPEN 60B W/O ·" MAX 15M OIL (\$)	0	1/2"	60	-	1/2" MALE	1/2" MALE	15	-
HN60153800A	REEL OPEN 60B W/O 3/8" MAX 15M OIL (\$)	0	3/8"	60	-	3/8" FEMALE	3/8" FEMALE	15	-
HN60201200A	REEL OPEN 60B W/O ·" MAX 20M OIL (\$)	0	1/2"	60	-	1/2" MALE	1/2" MALE	20	-
WITH HOSE									
HA6010120B	REEL O 6OB W/-" 33FT/10MT OIL NPT/BSP	0	1/2"	60	10 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	10
HA6015120B	REEL O 6OB W/-" 50FT/15MT OIL NPT/BSP	0	1/2"	60	16 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	15
HA6020120B	REEL OPEN 60B W/·" 65F/20M OIL NPT/BSP	0	1/2"	60	25 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	20
HA60153400A	REEL OPEN 60B W/ ·" 15MT OIL (\$)	0	3/4"	60	4,5 @ 30 L/MIN*	1" MALE	3/4" MALE	-	15
HA60101000A	REEL OPEN 60B W/ 1" 10MT OIL	0	1"	60	2 @ 30 L/MIN*	1" MALE	1" MALE	-	10
HA60203400A	REEL OPEN6OB ·" 20MT OIL IN/HOSE 1M(\$)	0	3/4"	60	-	3/4" FEMALE	3/4" FEMALE	-	20

(\*) PRESSURE DROP FOR OIL 200 CST

## **OIL HOSE REEL**